

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2000-255217  
 (43)Date of publication of application : 19.09.2000

(51)Int. CI. B60C 11/11  
 B60C 11/04  
 B60C 11/12


(21)Application number : 11-064863 (71)Applicant : BRIDGESTONE CORP  
 (22)Date of filing : 11.03.1999 (72)Inventor : OCHI NAOYA

## (54) PNEUMATIC TIRE

## (57)Abstract:

PROBLEM TO BE SOLVED: To provide a pneumatic tire which can exhibit high performance on ice and snow.

SOLUTION: High direct-driving stability and high cornering performance on snow can be provided by combining a circumferential wide width groove 14 with a circumferential narrow width groove 16. High traction property on ice and snow can be provided by providing multiple cross grooves 18 set such that an inclination angle thereof to a circumferential direction of the tire within the range of 40°-90°. Since an edge continuously rushes into a grounding surface 60 by an auxiliary groove 22 which divides a rhomboid land part partitioned by the circumferential wide width groove 14, the circumferential narrow width groove 16, and the cross grooves 18 into approximately two when the tire grounds, high cornering performance on ice and snow can be provided.

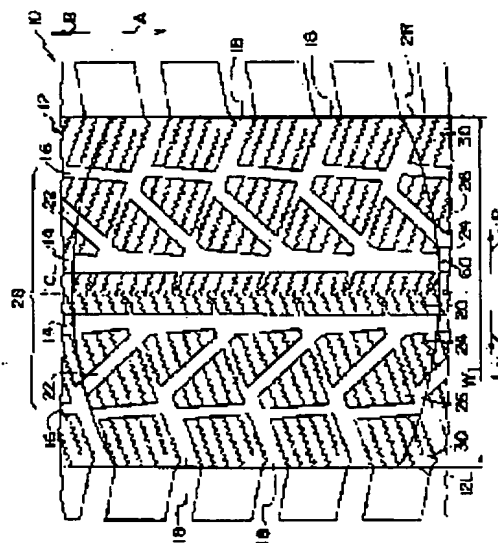

## LEGAL STATUS

[Date of request for examination]  
 [Date of sending the examiner's decision of rejection]  
 [Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]  
 [Date of final disposal for application]  
 [Patent number]

[Date of registration]

[Number of appeal against examiner's  
decision of rejection]

[Date of requesting appeal against  
examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998, 2003 Japan Patent Office